


104W / 9300lm / 4000K / DALI / Diffuse /
1715mm

62165

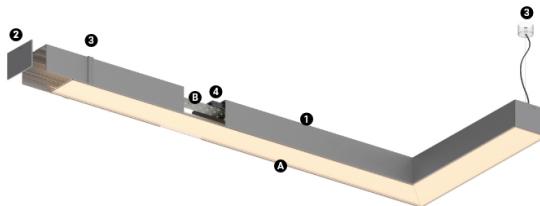

Structure
 1 Profile
 2 End caps
 3 Fitting accessories
 4 Profile coupling

Diffuser
 A Polycarbonate frost diffuser
Light Source
 B LED Modules

Design: O/M
 LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
 Power supply included.
 IP20 | 230Vac | 50/60Hz



LED 4000K

Light Source

Luminaire

Power

104W

121W

Flux

15000lm

9300lm

Efficiency

143lm/W


77lm/W

LOR

62%


UGR

<25



Beam angle
 Diffuse

Application



Weight
 0,5Kg

mm

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
 supplemented by 2021/340/EU Energy Consumption Labelling
 Ordinance. This product contains light sources of efficiency class C
 Model Identifier WU-M-536-S-BC-840

