


20+9W / 1675+700lm / 3000K / On/Off /  
Diffuse / batwing / 1399mm

62304

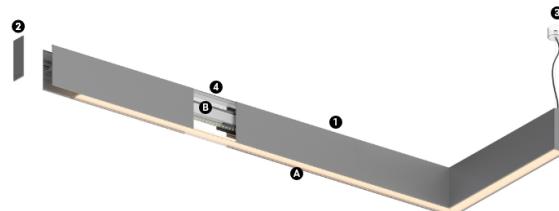

## Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

## Diffuser

- A Polycarbonate frost diffuser

## Light Source

- B LED Modules

Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

**LED** 3000K

**Light Source****Luminaire**


**Power** 20+9W 24,4+11,3W

**Flux** 3575+1100lm 1675+700lm

**Efficiency** 157lm/W 64lm/W

**LOR** - 51%

**UGR** - <22



**Beam angle**  
**Diffuse / batwing**

**Application**

**Weight**  
**0,51Kg**

mm

**Finishes**

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

**Data according to regulations**

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
and E

Model Identifier 89603211, 89603216, WU-M-594-830

