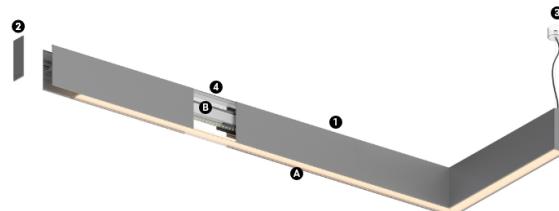


27+20W / 2300+1380lm / 3000K / DALI /
Diffuse / batwing / 1119mm

62311



Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Diffuser

- A Polycarbonate frost diffuser

Light Source

- B LED Modules



Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

LED 3000K
mm

Light Source	Luminaire
Power 27+20W	32,9+24,4W
Flux 4900+2200lm	2300+1380lm
Efficiency 151lm/W	64lm/W
LOR -	52%
UGR -	<25

Beam angle
Diffuse / batwingWeight
0,58Kg

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
and E

Model Identifier WU-M-594-830, 89603216

