


20+9W / 1775+740lm / 4000K / DALI /  
Diffuse / batwing / 1399mm

62326

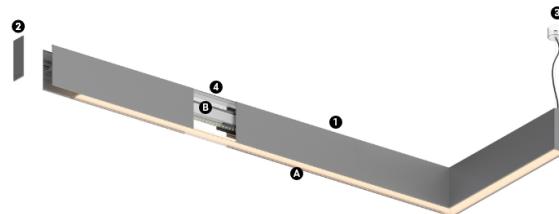

## Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

## Diffuser


- A Polycarbonate frost diffuser

## Light Source

- B LED Modules

Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz
**4000K**
**Light Source****Luminaire****Power** **20+9W** **24,4+11,3W****Flux** **3775+1180lm** **1775+740lm****Efficiency** **171lm/W** **70lm/W****LOR** **-** **51%****UGR** **-** **<22****Beam angle**  
**Diffuse / batwing****Application****Weight**  
**0,6Kg**
**mm**
**Finishes**For the specific supply of "DALI 2" drivers, please contact:  
[support@om-light.com](mailto:support@om-light.com)Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: [support@om-light.com](mailto:support@om-light.com)**Data according to regulations**2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
and E

Model Identifier 89603212, 89603217, WU-M-594-840

