


20+9W / 1775+740lm / 4000K / DALI /
Diffuse / batwing / 1399mm

62326

Design: O/M
LED light source with good colour consistency and
long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

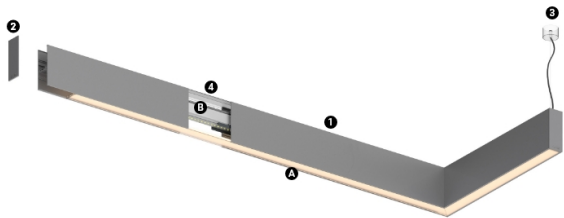

- Structure**

 - 1 Profile
 - 2 End caps
 - 3 Fitting accessories
 - 4 Profile coupling
- Diffuser**

 - A Polycarbonate frost diffuser
- Light Source**

 - B LED Modules

LED	4000K	Light Source	Luminaire
Power		20+9W	24,4+11,3W
Flux		3775+1180lm	1775+740lm
Efficiency		171lm/W	70lm/W
LOR		-	51%
UGR		-	<22



Beam angle
Diffuse / batwing

Application



Weight
0,6Kg



Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to
model the right lighting functions for different tasks. For further
information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
and E

Model Identifier 89603212, 89603217, WU-M-594-840