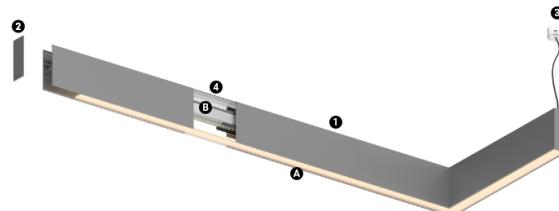


24+13W / 2130+1110lm / 4000K / DALI /  
Diffuse / batwing / 1679mm

62328



## Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

## Diffuser

- A Polycarbonate frost diffuser

## Light Source

- B LED Modules



Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

LED 4000K  
mm

	Light Source	Luminaire
Power	24+13W	29,3+15,9W
Flux	4530+1770lm	2130+1110lm
Efficiency	170lm/W	72lm/W
LOR	-	51%
UGR	-	<22

Beam angle  
Diffuse / batwingWeight  
0,8Kg

## Finishes

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

## Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
and E

Model Identifier WU-M-594-840, 89603217

