

63W / 3300lm / 3000K / DALI / Diffuse  
indirect / 1560mm

62367




Design: Eduardo Souto de Moura  
Pendant luminaire with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with textured electrostatic 100% polyester paint.  
Frosted acrylic diffuser with user friendly clipping system.  
Steel end caps with textured electrostatic 100% polyester paint.  
Frosted acrylic diffuser for indirect light.  
Three-phase track (On/Off or DALI) for installing spotlights.  
Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



	<b>3000K</b>	<b>Light Source</b>	<b>Luminaire</b>
<b>Power</b>	<b>63W</b>	<b>90W</b>	
<b>Flux</b>	<b>8200lm</b>	<b>3300lm</b>	
<b>Efficiency</b>	<b>130lm/W</b>	<b>37lm/W</b>	
<b>LOR</b>	-	<b>40%</b>	
<b>UGR</b>	-	<b>&lt;25</b>	




<b>Application</b>

<b>Weight</b>
<b>7Kg</b>

mm

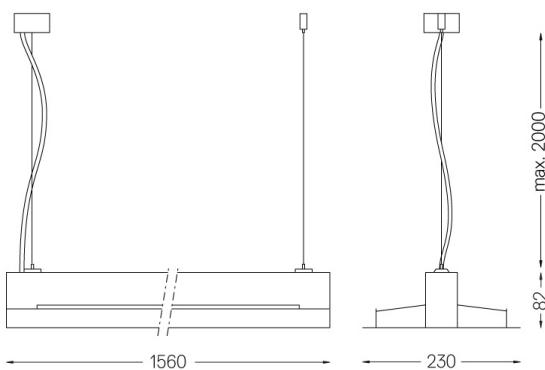

#### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

#### Mandatory

56051 Clear base DALI  
Ø60x35mm  
54081 Aluminium base DALI  
Ø60x37mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com