

45W / 2300lm / 4000K / On/Off / Diffuse  
indirect / 1560mm

62370




Design: Eduardo Souto de Moura  
Pendant luminaire with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with textured electrostatic 100% polyester paint.  
Frosted acrylic diffuser with user friendly clipping system.  
Steel end caps with textured electrostatic 100% polyester paint.  
Frosted acrylic diffuser for indirect light.  
Three-phase track (On/Off or DALI) for installing spotlights.  
Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



	<b>4000K</b>	<b>Light Source</b>	<b>Luminaire</b>
<b>Power</b>	<b>45W</b>	<b>65W</b>	
<b>Flux</b>	<b>5750lm</b>	<b>2300lm</b>	
<b>Efficiency</b>	<b>128lm/W</b>	<b>35lm/W</b>	
<b>LOR</b>	-	<b>40%</b>	
<b>UGR</b>	-	<b>&lt;25</b>	




Beam angle  
Diffuse indirect



Weight  
7Kg

mm

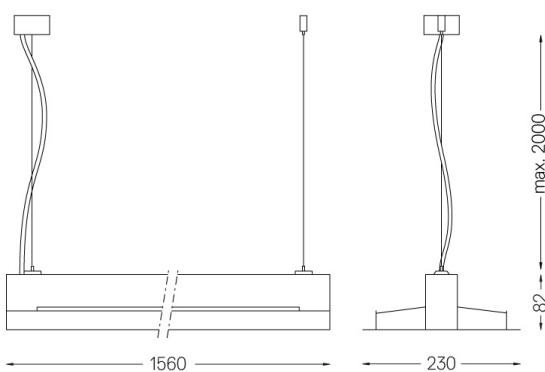

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Mandatory

54034 Clear base  
Ø60x35mm  
54080 Aluminium base  
Ø60x37mm