

63W / 3300lm / 4000K / On/Off / Diffuse
indirect / 1560mm

62371



Design: Eduardo Souto de Moura
Pendant luminaire with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with textured electrostatic 100% polyester paint.

Frosted acrylic diffuser with user friendly clipping system.

Steel end caps with textured electrostatic 100% polyester paint.

Frosted acrylic diffuser for indirect light.

Three-phase track (On/Off or DALI) for installing spotlights.
Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



4000K

Light Source

Luminaire

Power

63W

90W

Flux

8200lm

3300lm

Efficiency

130lm/W

37lm/W

LOR


-

40%

UGR

-

<25




Beam angle
Diffuse indirect

Application

Weight
7Kg

mm

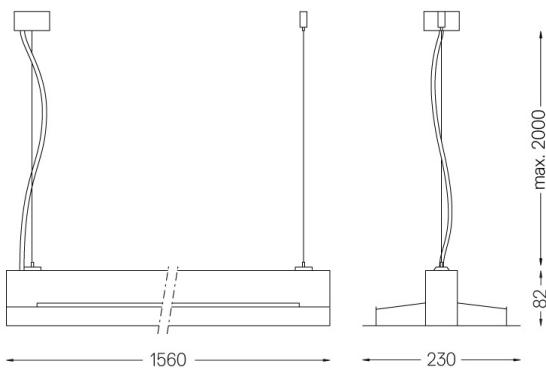

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Mandatory

54034 Clear base
Ø60x35mm
54080 Aluminium base
Ø60x37mm