

16W / 2100lm / 2700K / DALI / Diffuse /
1192mm


62520

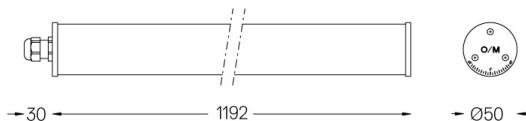


Design: Eduardo Souto de Moura

Surface or pendant luminaire with tubular shock-resistant frosted polycarbonate body with 50mm diameter.

Clear polycarbonate end caps with marked installation angles. Supplied with 30mm plastic cable gland that prevents condensation within luminaire. Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam Power supply included.
IP67 | IK08 | 230Vac | 50/60Hz
2700K
Light Source **Luminaire**
Power **16W** **19,5W**
Flux **2800lm** **2100lm**
Efficiency **175lm/W** **108lm/W**
LOR **-** **75%**
UGR **-** **<25**

Beam angle
Diffuse
Application
Weight
1,3Kg
mm
Finishes
.25 Frost
Mandatory
43701 Surface fitting accessory
43705 Pendant fitting accessory
Optional
59057 Stainless steel fitting accessory

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains light sources of efficiency class C
Model Identifier 28004771