

## Tubo 50

32W / 4200lm / 2700K / DALI / Diffuse /  
2312mm

62524




Design: Eduardo Souto de Moura  
Surface or pendant luminaire with tubular shock-resistant frosted polycarbonate body with 50mm diameter.  
Clear polycarbonate end caps with marked installation angles. Supplied with 30mm plastic cable gland that prevents condensation within luminaire. Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP67 | IK08 | 230Vac | 50/60Hz



LED	2700K	Light Source	Luminaire
Power		32W	37,6W
Flux		5600lm	4200lm
Efficiency		175lm/W	112lm/W
LOR		-	75%
UGR		-	<25




Beam angle  
Diffuse

Application



Weight  
2,3Kg

mm

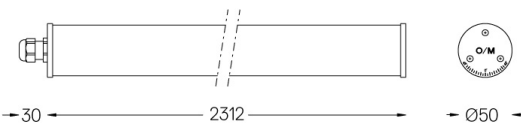

Finishes

● .25 Frost

Mandatory

43702 Surface fitting accessory (>2000mm)

43706 Pendant fitting accessory (>2000mm)

Optional

59061 Stainless steel fitting accessory (>2000mm)

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
Model Identifier 28004771