

## Tubo 50

54W / 7800lm / 4000K / DALI / Diffuse / 2312mm

62557



Design: Eduardo Souto de Moura  
Surface or pendant luminaire with tubular shock-resistant frosted polycarbonate body with 50mm diameter.  
Clear polycarbonate end caps with marked installation angles. Supplied with 30mm plastic cable gland that prevents condensation within luminaire. Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP67 | IK08 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		54W	63,5W
Flux		10400lm	7800lm
Efficiency		193lm/W	123lm/W
LOR		-	75%
UGR		-	<28




Beam angle  
Diffuse

Application



Weight  
2,3Kg

mm

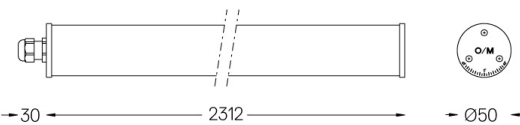

Finishes

● .25 Frost

Mandatory

**43702** Surface fitting accessory (>2000mm)

**43706** Pendant fitting accessory (>2000mm)

Optional

**59061** Stainless steel fitting accessory (>2000mm)

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class B  
Model Identifier 28004774