

Tubo 50

14W / 1950lm / 4000K / On/Off / Diffuse / 632mm

62591





Design: Eduardo Souto de Moura
Surface or pendant luminaire with tubular shock-resistant frosted polycarbonate body with 50mm diameter.
Clear polycarbonate end caps with marked installation angles. Supplied with 30mm plastic cable gland that prevents condensation within luminaire. Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP67 | IK08 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power	14W	2600lm	17,1W
Flux	186lm/W	-	114lm/W
Efficiency	-	-	75%
LOR	-	-	<28
UGR	-	-	-

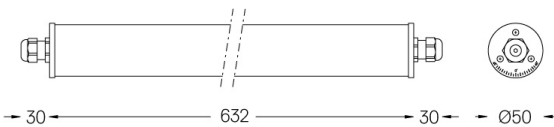

Finishes

- .25 Frost

Mandatory

- 43701 Surface fitting accessory
- 43703 Pendant fitting accessory

Optional

- 59057 Stainless steel fitting accessory

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class B Model Identifier 28004774