

## Tubo 70

54W / 6880lm / 2700K / DALI / Diffuse / 2312mm

62669




Design: Eduardo Souto de Moura  
 Surface or pendant luminaire with tubular shock-resistant frosted polycarbonate body with 70mm diameter.  
 Clear polycarbonate end caps with marked installation angles. Supplied with 30mm plastic cable gland that prevents condensation within luminaire. Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
 Power supply included.  
 IP67 | IK08 | 230Vac | 50/60Hz



LED	2700K	Light Source	Luminaire
Power		54W	63,5W
Flux		9560lm	6880lm
Efficiency		177lm/W	108lm/W
LOR		-	72%
UGR		-	<25

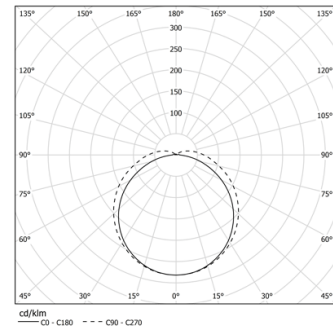


Beam angle  
Diffuse

Application



Weight  
2,6Kg

mm

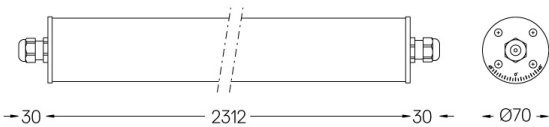

Finishes

● .25 Frost

Mandatory

43708 Surface fitting accessory (>2000mm)

43712 Pendant fitting accessory (>2000mm)

Optional

59062 Stainless steel fitting accessory (>2000mm)

59059 Wall fitting accessory

For the specific supply of "DALI 2" drivers, please contact:  
[support@om-light.com](mailto:support@om-light.com)

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C Model Identifier 28004771