

34W / 4400lm / 3000K / DALI / Diffuse /  
1472mm

62683



Design: Eduardo Souto de Moura

Surface or pendant luminaire with tubular shock-resistant frosted polycarbonate body with 70mm diameter.

Clear polycarbonate end caps with marked installation angles. Supplied with 30mm plastic cable gland that prevents condensation within luminaire. Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam Power supply included.  
IP67 | IK08 | 230Vac | 50/60Hz

LED 3000K

Light Source Luminaire


Power 34W 40W

Flux 6125lm 4400lm

Efficiency 180lm/W 110lm/W

LOR - 72%

UGR - &lt;25

Beam angle  
Diffuse

Application

Weight  
1,7Kg

mm

Finishes

.25 Frost

Mandatory

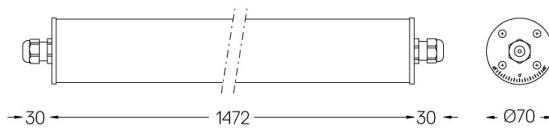
43707 Surface fitting accessory

43711 Pendant fitting accessory

Optional

59058 Stainless steel fitting accessory

59059 Wall fitting accessory

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class C  
Model Identifier 28004772, 28004761