

O975 Surface/Pendant

51W / 4400lm / 4000K / On/Off / Diffuse /
1160mm

62715




Design: Eduardo Souto de Moura
Surface or pendant luminaire with housing made of anodised aluminium profile with matt or textured-paint finish and frosted polycarbonate diffuser with user friendly clipping system.

5mm frosted polycarbonate end caps.
Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP44 | IK07 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		51W	60W
Flux		6300lm	4400lm
Efficiency		124lm/W	73lm/W
LOR		-	70%
UGR		-	<22




Beam angle
Diffuse

Application



Weight
1,86Kg

mm

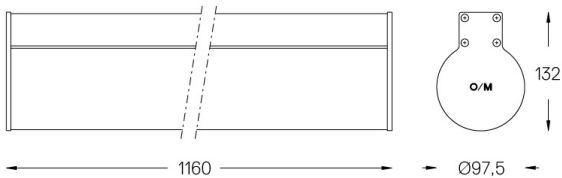

Finishes


- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium

Mandatory

- 44070 Pendant fitting accessory
Ø60x35mm
- 44060 Clear base
Ø60x35mm

Pendant direct fitting
accessory

44070


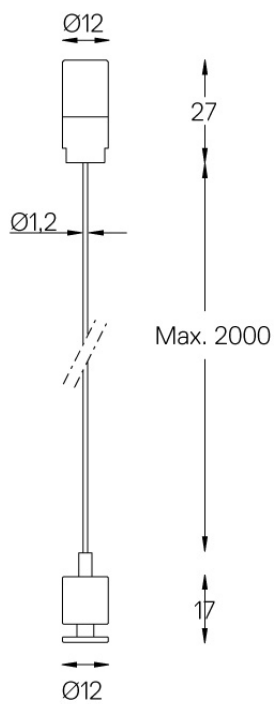


One 2m steel cable (Ø1,2mm) for
pendant application with
millimetric height adjustment
system.

One on each end of the profile
segment and every 3m.

Clear Base

44060



35

Ø60



On/Off (3x0,75mm²). Includes:
One clear polycarbonate power supply base (IP20).
One clear power cable (2m).
One clear power supply base must be applied every 30m (ø60x35mm)