

## O975 Surface/Pendant

102W / 8800lm / 4000K / On/Off / Diffuse /  
2287mm

62717




Design: Eduardo Souto de Moura  
Surface or pendant luminaire with housing made of anodised aluminium profile with matt or textured-paint finish and frosted polycarbonate diffuser with user friendly clipping system.

5mm frosted polycarbonate end caps.  
Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP44 | IK07 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		102W	117W
Flux		12600lm	8800lm
Efficiency		124lm/W	75lm/W
LOR		-	70%
UGR		-	<22

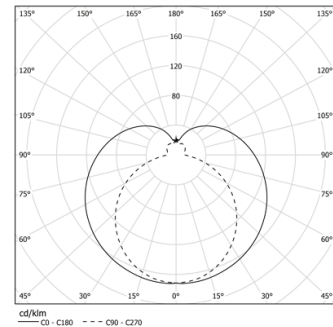


Beam angle  
Diffuse

Application



Weight  
3,66Kg

mm

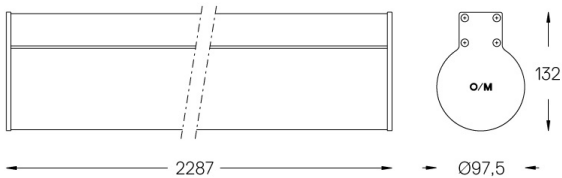

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium

Mandatory

44070 Pendant fitting accessory


Ø60x35mm

44060 Clear base

Ø60x35mm

Pendant direct fitting  
accessory

44070


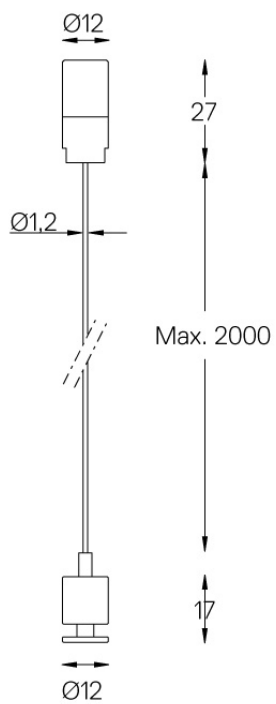


One 2m steel cable (Ø1,2mm) for  
pendant application with  
millimetric height adjustment  
system.

One on each end of the profile  
segment and every 3m.

Clear Base

44060



35

Ø60



On/Off (3x0,75mm<sup>2</sup>). Includes:  
One clear polycarbonate power supply base (IP20).  
One clear power cable (2m).  
One clear power supply base must be applied every 30m (ø60x35mm)