

51W / 4400lm / 4000K / DALI / Diffuse /
1160mm

62720



Design: Eduardo Souto de Moura
Surface or pendant luminaire with housing made of anodised aluminium profile with matt or textured-paint finish and frosted polycarbonate diffuser with user friendly clipping system.
5mm frosted polycarbonate end caps.
Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP44 | IK07 | 230Vac | 50/60Hz




LED 4000K

Light Source

Luminaire

| | | |
|------------|---------|--------|
| Power | 51W | 60W |
| Flux | 6300lm | 4400lm |
| Efficiency | 124lm/W | 73lm/W |
| LOR | - | 70% |
| UGR | - | <22 |



Beam angle
Diffuse

Application




Weight
1,86Kg

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium

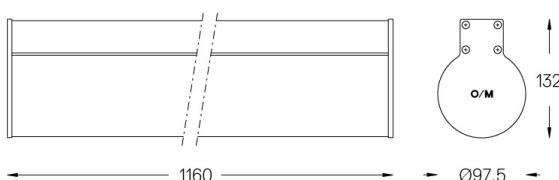

Mandatory

44070 Pendant fitting accessory
Ø60x35mm
44110 Clear base DALI
Ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com