

## O975 Surface/Pendant

63W / 5550lm / 4000K / DALI / Diffuse /  
1440mm

62721



Design: Eduardo Souto de Moura  
Surface or pendant luminaire with housing made of anodised aluminium profile with matt or textured-paint finish and frosted polycarbonate diffuser with user friendly clipping system.


5mm frosted polycarbonate end caps.  
Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.

IP44 | IK07 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		63W	74,1W
Flux		7900lm	5550lm
Efficiency		125lm/W	75lm/W
LOR		-	70%
UGR		-	<22




Beam angle  
Diffuse

Application



Weight  
2,3Kg

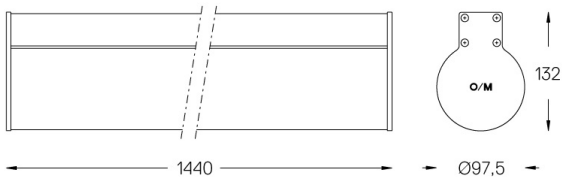

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium

Mandatory

44070 Pendant fitting accessory

Ø60x35mm

44110 Clear base DALI

Ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com