

114W / 10000lm / 4000K / DALI / Diffuse /
2850mm

62723




Design: Eduardo Souto de Moura
Surface or pendant luminaire with housing made of anodised aluminium profile with matt or textured-paint finish and frosted polycarbonate diffuser with user friendly clipping system.
5mm frosted polycarbonate end caps.
Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP44 | IK07 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		114W	131W
Flux		14250lm	10000lm
Efficiency		125lm/W	76lm/W
LOR		-	70%
UGR		-	<22




Beam angle
Diffuse

Application



Weight
4,56Kg

mm

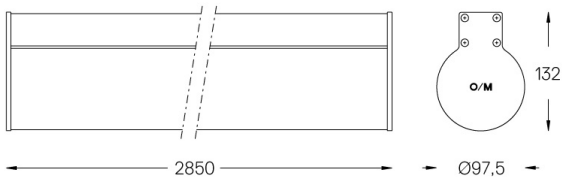

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium

Mandatory

44070 Pendant fitting accessory

Ø60x35mm


44110 Clear base DALI

Ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Pendant direct fitting
accessory

44070


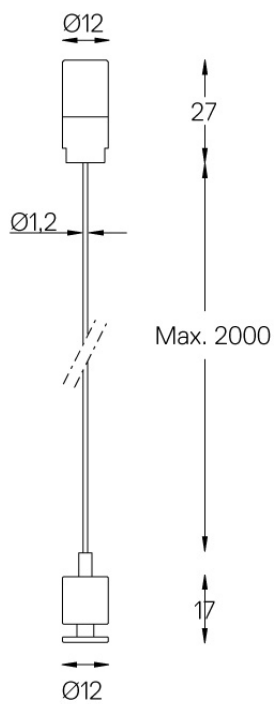


One 2m steel cable ($\text{Ø}1,2\text{mm}$) for pendant application with millimetric height adjustment system.

One on each end of the profile segment and every 3m.

Clear Base DALI

44110



35

Ø60



DALI (5x0,75mm²). Includes:
One clear polycarbonate power supply base (IP20).
One clear power cable (2m).
One clear power supply base must be applied every 30m (ø60x35mm)