

Dot Ground / Concrete

2,2W / 180lm / 3000K / On/Off / Medium 21°
/ Ø36mm

62728



Design: O/M

Ground-recessed luminaire made of anodised aluminium body with 25-micron maximum corrosion resistance anodization and frame in aluminium matt finish.

Tempered clear glass diffuser.


Recessed housing and driver supplied separately.

Values for 700mA. For 350mA estimate half of the indicated values.

LED CRI>90 / >50.000h, L80/B10 / 3-step MacAdam
IP67 | 350mA / 700mA



LED	3000K	Light Source	Luminaire
Power		2,2W	2,2W
Flux		215lm	180lm
Efficiency		98lm/W	82lm/W
LOR		-	84%
UGR		-	<19

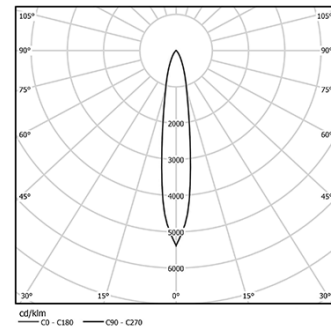


Beam angle
Medium 21°

Application



Weight
0,07Kg

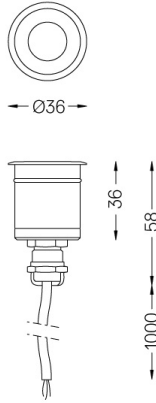

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .12 Brushed stainless steel
- .34 Rust

Mandatory

27396 Recessed housing
Ø32x80mm

59124 15W Driver

1 to 10 luminaires / 350mA

59125 8W Driver

1 to 5 luminaires / 350mA

59126 15W Driver

1 to 10 luminaires / 350mA

59127 25W Driver

5 to 18 luminaires / 350mA

59128 11W Driver

1 to 4 luminaires / 700mA

59129 35W Driver

1 to 12 luminaires / 700mA

59130 17W Driver

1 to 5 luminaires / 700mA

59131 48W Driver

1 to 18 luminaires / 700mA

Optional

27400 IP68 Connector 2 way

4 poles

27395 IP68 Pass-through wiring connection box

3 way

59052 Spike for ground/garden application