

24W / 3150lm / 2700K / DALI / Diffuse /  
1752mm

62738




Design: Eduardo Souto de Moura  
 Surface or pendant luminaire with tubular shock-resistant frosted polycarbonate body with 50mm diameter.  
 Clear polycarbonate end caps with marked installation angles. Supplied with 30mm plastic cable gland that prevents condensation within luminaire.  
 Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
 Power supply included.  
 IP67 | IK08 | 230Vac | 50/60Hz



LED	2700K	Light Source	Luminaire
Power	24W	29,3W	
Flux	4200lm	3150lm	
Efficiency	175lm/W	108lm/W	
LOR	-	75%	
UGR	-	<25	



Beam angle  
Diffuse



Weight  
1,6Kg

mm

Finishes

.25 Frost

Mandatory


43701 Surface fitting accessory

43705 Pendant fitting accessory

Optional

59057 Stainless steel fitting accessory

For the specific supply of "DALI 2" drivers, please contact:  
 support@om-light.com

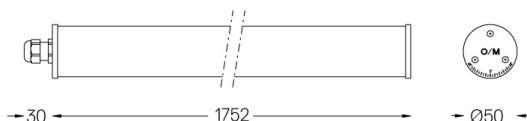

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
 supplemented by 2021/340/EU Energy Consumption Labelling  
 Ordinance. This product contains light sources of efficiency class C  
 Model Identifier 28004771