


6,8W / 740lm / 2700K / On/Off / Prismatic /  
559mm

62966

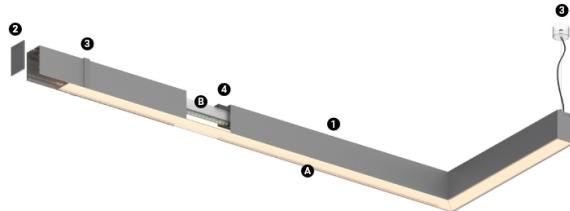

**Structure**  
1 Profile  
2 End caps  
3 Fitting accessories  
4 Profile coupling

**Diffuser**  
A Polycarbonate frost diffuser  
**Light Source**  
B LED Modules

Design: O/M  
LED light source with good colour consistency and long operation lifespan.


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



LED 2700K


Light Source Luminaire

Power	6,8W	8,5W
Flux	1200lm	740lm
Efficiency	176lm/W	87lm/W
LOR	-	62%
UGR	-	<19



**Beam angle**  
Prismatic

Application



**Weight**  
0,5Kg

mm

Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class D  
Model Identifier 89603215

