

17W / 1850lm / 2700K / DALI / Prismatic /  
1399mm

62992

Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

#### Diffuser

- A Polycarbonate frost diffuser

#### Light Source


- B LED Modules

| LED        | 2700K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 17W          | 20,7W     |
| Flux       |       | 3000lm       | 1850lm    |
| Efficiency |       | 176lm/W      | 89lm/W    |
| LOR        |       | -            | 62%       |
| UGR        |       | -            | <19       |




Beam angle  
Prismatic

#### Application



Weight  
0,58Kg

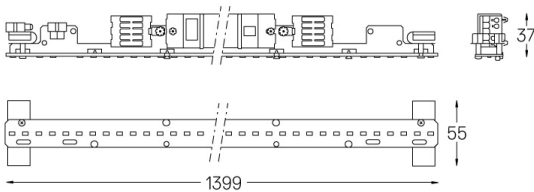

#### Finishes

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

#### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C and D

Model Identifier 89603210, 89603215