


41W / 4440lm / 2700K / DALI + E-KIT /
Prismatic / 1679mm

62997

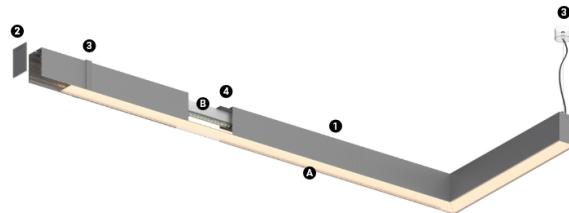

Structure
 1 Profile
 2 End caps
 3 Fitting accessories
 4 Profile coupling

Diffuser
 A Polycarbonate frost diffuser
Light Source
 B LED Modules

Design: O/M
 LED light source with good colour consistency and long operation lifespan.


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
 Power supply included.
 IP20 | 230Vac | 50/60Hz



2700K


Light Source **Luminaire**

Power	41W	48,2W
Flux	7170lm	4440lm
Efficiency	175lm/W	92lm/W
LOR	-	62%
UGR	-	<22



Beam angle
Prismatic

Application



Weight
0,8Kg

mm

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
 supplemented by 2021/340/EU Energy Consumption Labelling
 Ordinance. This product contains light sources of efficiency class D
 Model Identifier 89603215

