


17W / 1900lm / 3000K / DALI / Prismatic /  
699mm

63019

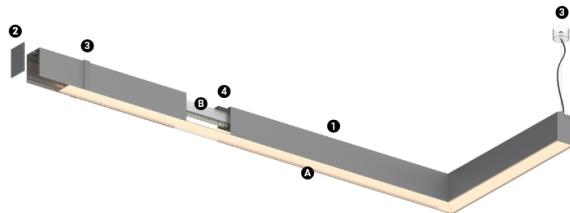

**Structure**  
1 Profile  
2 End caps  
3 Fitting accessories  
4 Profile coupling

**Diffuser**  
A Polycarbonate frost diffuser  
**Light Source**  
B LED Modules

Design: O/M  
LED light source with good colour consistency and long operation lifespan.


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



**3000K**


**Light Source** **Luminaire**

<b>Power</b>	<b>17W</b>	<b>20,7W</b>
<b>Flux</b>	<b>3060lm</b>	<b>1900lm</b>
<b>Efficiency</b>	<b>180lm/W</b>	<b>92lm/W</b>
<b>LOR</b>	<b>-</b>	<b>62%</b>
<b>UGR</b>	<b>-</b>	<b>&lt;22</b>



**Beam angle**  
**Prismatic**

**Application**



**Weight**  
**0,5Kg**

**mm**

**Finishes**

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

**Data according to regulations**

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
Model Identifier 89603206, 89603216

