


14W / 1610lm / 4000K / On/Off / Prismatic /
559mm

63031

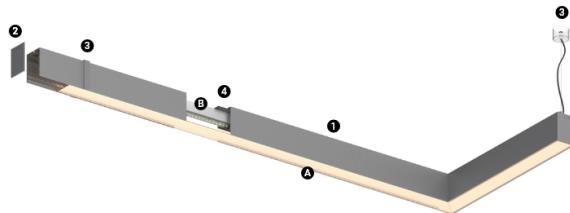

| Structure | Diffuser |
|-----------------------|-----------------------|
| 1 Profile | A Polycarbonate frost |
| 2 End caps | diffuser |
| 3 Fitting accessories | |
| 4 Profile coupling | B LED Modules |

Design: O/M
LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz




4000K

Light Source


Luminaire

| | | |
|-------------------|----------------|---------------|
| Power | 14W | 17,1W |
| Flux | 2600lm | 1610lm |
| Efficiency | 186lm/W | 94lm/W |
| LOR | - | 62% |
| UGR | - | <22 |



Beam angle
Prismatic

Application



Weight
0,5Kg

mm

Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class C
Model Identifier 89603217

