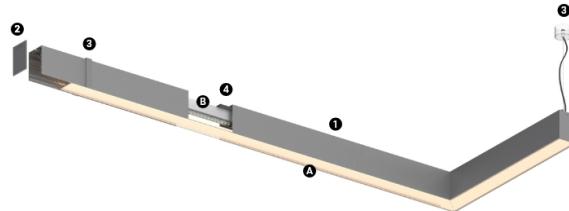


8,5W / 1000lm / 4000K / On/Off / Prismatic
/ 699mm

63034



Structure	Diffuser
1 Profile	A Polycarbonate frost
2 End caps	diffuser
3 Fitting accessories	
4 Profile coupling	B LED Modules

Design: O/M

LED light source with good colour consistency and long operation lifespan.


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

LED 4000K


Light Source

Luminaire

Power	8,5W	10,6W
Flux	1625lm	1000lm
Efficiency	191lm/W	94lm/W
LOR	-	62%
UGR	-	<19

Beam angle
Prismatic

Application

Weight
0,5Kg

mm

Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
Model Identifier 89603207, 89603217