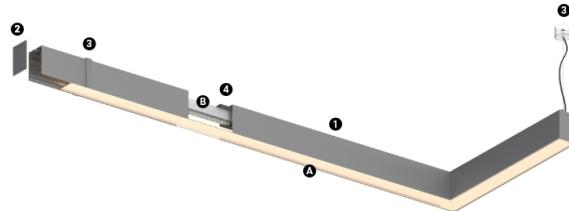


20W / 2415lm / 4000K / On/Off / Prismatic /
839mm

63037



Structure	Diffuser
1 Profile	A Polycarbonate frost
2 End caps	diffuser
3 Fitting accessories	
4 Profile coupling	B LED Modules

Design: O/M


LED light source with good colour consistency and
long operation lifespan.LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

LED 4000K


Light Source

Luminaire

Power	20W	24,4W
Flux	3900lm	2415lm
Efficiency	195lm/W	99lm/W
LOR	-	62%
UGR	-	<22

Beam angle
Prismatic

Application

Weight
0,51Kg

mm

Finishes

Choose the length and layout of the system exactly as you want it, to
model the right lighting functions for different tasks. For further
information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
Model Identifier 89603212, 89603217