U60
Made-to-measure

10W / 1200lm / 4000K / DALI / Prismatic / 839mm

63052

Design: O/M
LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

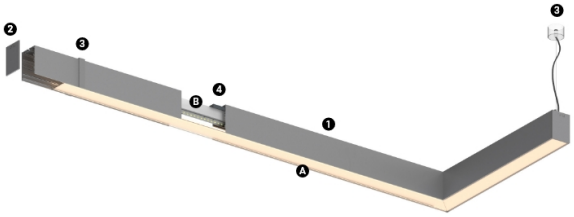

Structure
1 Profile
2 End caps
3 Fitting accessories
4 Profile coupling

Diffuser
A Polycarbonate frost diffuser

Light Source
B LED Modules

LED 4000K	Light Source	Luminaire
Power	**10W**	**12,2W**
Flux	**1950lm**	**1200lm**
Efficiency	**195lm/W**	**98lm/W**
LOR	**-**	**62%**
UGR	**-**	**<19**



Beam angle
Prismatic

Application



Weight
0,51Kg

mm

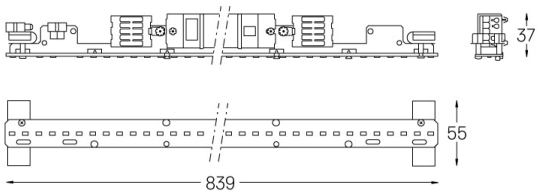

Finishes

For the specific supply of "DALI 2" drivers, please contact: support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations
2019/2020/EU supplemented by 2021/341 |2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C
Model Identifier 89603212, 89603217

This page was generated on 2026-01-16. Click here for the latest version.

www.om-light.com / mail@om-light.com Rua Maurício Lourenço Oliveira 186, 4405-034 Vila Nova de Gaia, Porto. Portugal. / Apartado 1538 4401-901 Vila Nova de Gaia, Porto Portugal / tel. +351 223 710 419