

10W / 1110lm / 4000K / DALI / Spot 12° /  
ø45mm

63138



Design: O/M

Adjustable spotlight with aluminium body for installation on three-phase track.


The spotlight can be rotated up to 90° horizontally and 330° vertically.

Accessories available separately and easily applicable after installation.

LED CRI>80 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



	<b>4000K</b>	<b>Light Source</b>	<b>Luminaire</b>
<b>Power</b>	<b>10W</b>	<b>12,5W</b>	
<b>Flux</b>	<b>1240lm</b>	<b>1110lm</b>	
<b>Efficiency</b>	<b>136lm/W</b>	<b>89lm/W</b>	
<b>LOR</b>	<b>-</b>	<b>0.82</b>	
<b>UGR</b>	<b>-</b>	<b>&lt;13</b>	




Beam angle  
Spot 12°



Weight  
0,6Kg

mm

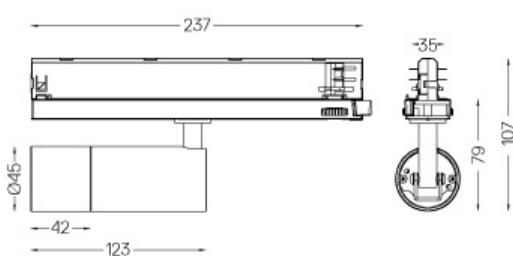

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

- 59016 Elliptical refractor  
Ø39x0,5mm
- 59017 Soft diffuser  
Ø39x0,5mm
- 59018 Louvre  
Ø39x3mm
- 59019 Snoot 72mm  
Ø45x72

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier 2053560247H