

Beam Adjustable

4,5W / 390lm / 3000K / DALI / Flood 37° /
ø75mm

63198



Design: O/M
Ceiling-recessed luminaire made of aluminium die-cast.

Adjustable version (orientable by 30° on the horizontal axis and 355° on the vertical axis). Recessing accessory for flush version supplied separately.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



3000K

Light Source Luminaire


Power 4,5W 5,8W

Flux 520lm 390lm

Efficiency 116lm/W 68lm/W

LOR - 75%

UGR - <19



Beam angle
Flood 37°

Application


Weight
0,38Kg

mm

Ø70 (trim version)

Finishes

- .04 Matt White
- .05 Matt Black

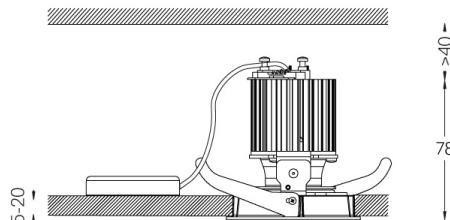

Optional

59063 Flush accessory (12,5mm ceilings)

176x17mm

59064 Flush accessory (15mm ceilings)

176x19,5mm

59065 Flush accessory (25mm ceilings)

176x29,5mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class F

Model Identifier 2053560257L