

10W / 1150lm / 4000K / On/Off / Flood 46° /
ø100mm

63228



Design: O/M
Ceiling-recessed luminaire made of aluminium die-cast.

Adjustable version (orientable by 30° on the horizontal axis and 355° on the vertical axis). Recessing accessory for flush version supplied separately.

LED CRI>80 / >50.000h, L80/B10
3-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



4000K

Light Source

Luminaire


Power 10W 12,5W

Flux 1450lm 1150lm

Efficiency 145lm/W 92lm/W

LOR - 79%

UGR - <22



Beam angle
Flood 46°




Weight
0,5Kg

mm

Ø 95 (trim version)

Finishes

- .04 Matt White
- .05 Matt Black

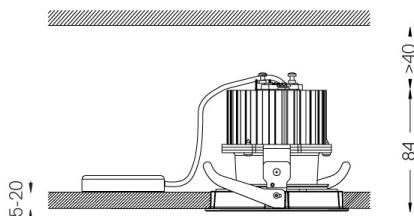

Optional

59066 Flush accessory (12,5mm ceilings)

201x17mm


59067 Flush accessory (15mm ceilings)

201x19,5mm

59068 Flush accessory (25mm ceilings)

201x29,5mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com



Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class E

Model Identifier BXRC-40E2000-C-73