


6,7W / 460lm / 2700K / DALI / Flood 52° /  
300mm

63348

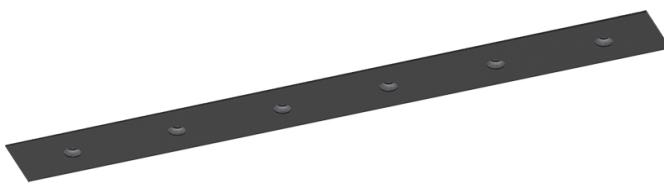

Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.

Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

**LED** 2700K

**Light Source** Luminaire


**Power** 6,7W 8,4W

**Flux** 600lm 460lm

**Efficiency** 90lm/W 58lm/W

**LOR** - 77%

**UGR** - <13




**Beam angle**  
**Flood 52°**



**Weight**  
**0,3Kg**

**Image not found or type unknown**

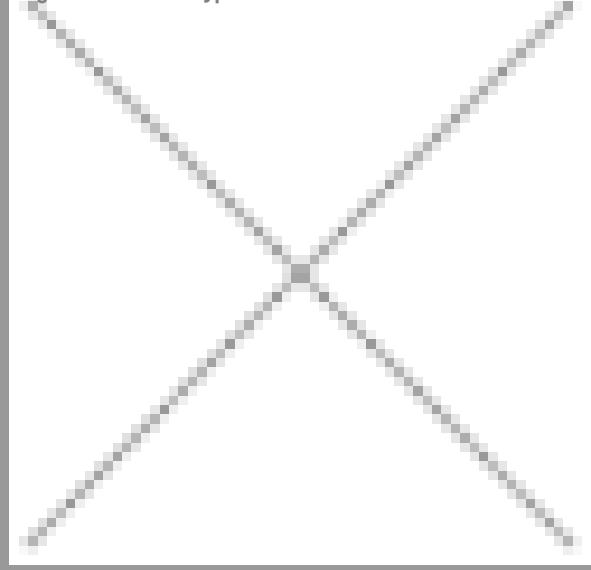

**Finishes**

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier 4053560342L