


27W / 1880lm / 3000K / DALI / Medium 31° /  
1200mm

63402

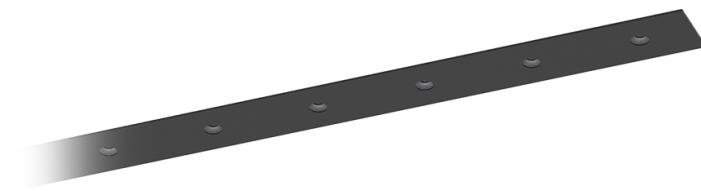

Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.

Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz
 3000K

	Light Source	Luminaire
Power	27W	32,9W
Flux	2580lm	1880lm
Efficiency	96lm/W	57lm/W
LOR	-	73%
UGR	-	<10



Beam angle  
Medium 31°Weight  
0,6Kg

Image not found or type unknown

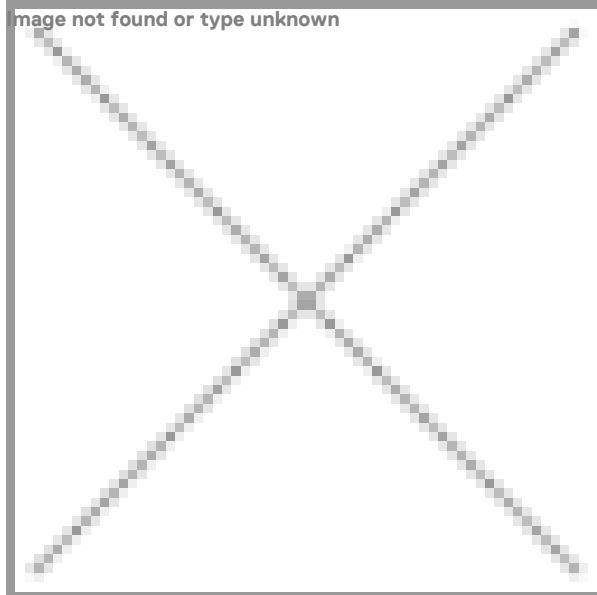

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class E  
Model Identifier 4053560343L