

Design: O/M + Bartenbach GmbH
Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.
Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



4000K

Power

Light Source

26W

Luminaire

31,7W

Flux

3400lm

2480lm

Efficiency

131lm/W

78lm/W

LOR


-

73%

UGR

-

<10




Beam angle
Medium 31°

Application



Weight
0,5Kg

Image not found or type unknown

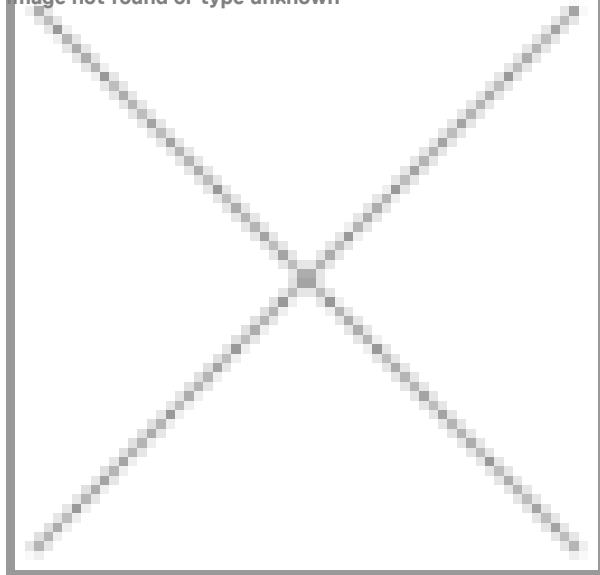

Finishes

- .01 White / RAL 9010**
- .02 Black / RAL 9005**

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class D
Model Identifier 4053560345H