


inVision

13W / 1290lm / 4000K / DALI / Flood 52° / 300mm

63437

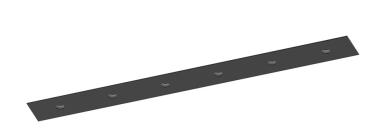

Design: O/M + Bartenbach GmbH Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with texturedfinish.


Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination. Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam Power supply included. IP20 | 230Vac | 50/60Hz





(4000K	Light Source	Luminaire
Power	13W	15,9W
Flux	1700lm	1290lm
Efficiency	131lm/W	81lm/W
LOR	-	76%
UGR	-	<16




Beam angle Flood 52°

Application



Weight

age	not	found	or	type	unknown



Finishes

O .01 White / RAL 9010 ● .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact: support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 |2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class D Model Identifier 4053560345H