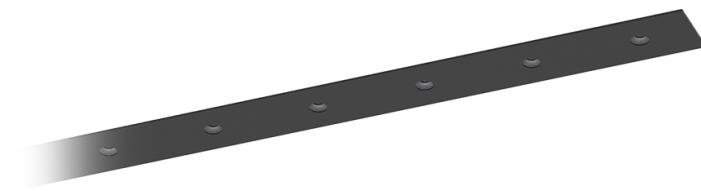


52W / 5160lm / 4000K / DALI / Flood 52° /
1200mm

63449




Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

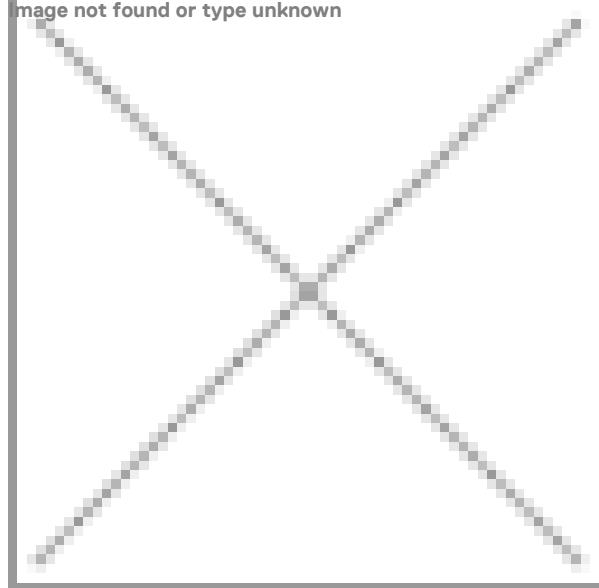
Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.

Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz
4000K
Light Source**Luminaire**
Power **52W** **61,2W**
Flux **6800lm** **5160lm**
Efficiency **131lm/W** **84lm/W**
LOR **-** **76%**
UGR **-** **<16**

Beam angle
Flood 52°

Weight
0,6Kg

Image not found or type unknown

**Finishes**

- .01 White / RAL 9010**
- .02 Black / RAL 9005**

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class D
Model Identifier 4053560345H