

O/M

One

5,6W / 410lm / 2700K / On/Off / Flood 56° /
ø60mm

63455



Design: O/M + Bartenbach GmbH
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
Lightcore optics for defined and perfectly controlled beam of light.
Easy recessing system with spring clips.


LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



2700K

Light Source Luminaire

Power	5,6W	7W
Flux	460lm	410lm
Efficiency	82lm/W	59lm/W
LOR	-	89%
UGR	-	<19



Beam angle
Flood 56°



Weight
0,28Kg


mm

Ø 053

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

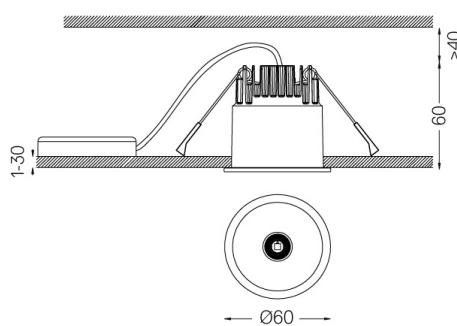

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class G
Model Identifier 4053560312H