



One Asymmetric

5,9W / 630lm / 4000K / On/Off /
Asymmetric / ø60mm

63468



Design: O/M + Bartenbach GmbH
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.

Accurate reflector for a defined and controlled beam of light, achieving maximum efficiency.
Fitting accessories for different applications are available.

LED CRI>80 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



4000K

Light Source Luminaire


Power 5,9W 7,4W

Flux 740lm 630lm

Efficiency 125lm/W 85lm/W

LOR - 85%

UGR - -



Beam angle
Asymmetric

Application

Weight


130 mm

Ø 53

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

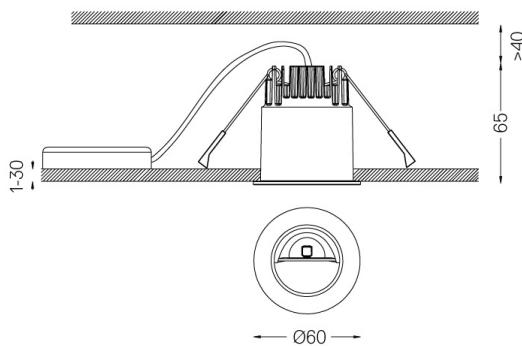

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class E
Model Identifier 4053560100