




Design: O/M + Bartenbach GmbH  
 Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
 Lightcore optics for defined and perfectly controlled beam of light.  
 Easy recessing system with spring clips.  
 Fitting accessories for different applications are available.

LED CRI>90 / >50.000h, L80/B10  
 2-step MacAdam / Power supply included.  
 IP20 | 230Vac | 50/60Hz



LED	2700K	Light Source	Luminaire
Power	3,1W	4W	
Flux	260lm	200lm	
Efficiency	84lm/W	50lm/W	
LOR	-	77%	
UGR	-	<10	



Beam angle  
**Medium 40°**



Weight  
**0,20Kg**


mm

037

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

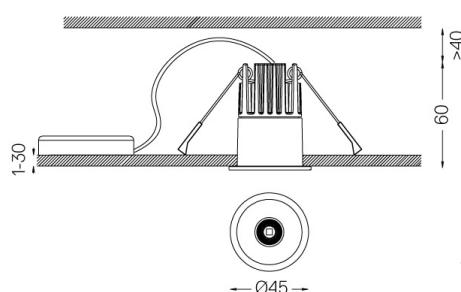

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
 supplemented by 2021/340/EU Energy Consumption Labelling  
 Ordinance. This product contains a light source of efficiency class G  
 Model Identifier 4053560312L