




Design: O/M + Bartenbach GmbH  
 Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
 Lightcore optics for defined and perfectly controlled beam of light.  
 Easy recessing system with spring clips.  
 Fitting accessories for different applications are available.

LED CRI>90 / >50.000h, L80/B10  
 2-step MacAdam / Power supply included.  
 IP20 | 230Vac | 50/60Hz



| LED        | 3000K  | Light Source | Luminaire |
|------------|--------|--------------|-----------|
| Power      | 3,1W   | 4W           |           |
| Flux       | 260lm  | 200lm        |           |
| Efficiency | 84lm/W | 50lm/W       |           |
| LOR        | -      | 77%          |           |
| UGR        | -      | <10          |           |



Beam angle  
**Medium 40°**



Weight  
**0,20Kg**


mm

037

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

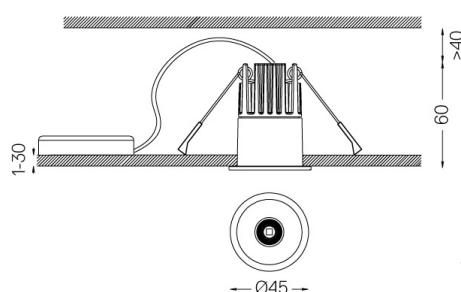

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
 supplemented by 2021/340/EU Energy Consumption Labelling  
 Ordinance. This product contains a light source of efficiency class G  
 Model Identifier 4053560290L