



Design: O/M + Bartenbach GmbH
 Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
 Lightcore optics for defined and perfectly controlled beam of light.
 Easy recessing system with spring clips.
 Fitting accessories for different applications are available.


LED CRI>80 / >50.000h, L80/B10
 2-step MacAdam / Power supply included.
 IP20 | 230Vac | 50/60Hz



4000K

Light Source Luminaire

| | | |
|------------|--------|--------|
| Power | 3,1W | 4W |
| Flux | 280lm | 240lm |
| Efficiency | 90lm/W | 60lm/W |
| LOR | - | 86% |
| UGR | - | <16 |



Beam angle
Flood 56°



Weight
0,20Kg

mm


037

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

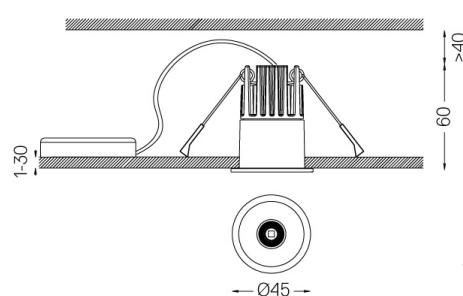

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
 supplemented by 2021/340/EU Energy Consumption Labelling
 Ordinance. This product contains a light source of efficiency class G
 Model Identifier 4053560313L