



## One Trimless

5,6W / 350lm / 3000K / On/Off / Medium  
40° / ø54mm

63514




Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Lightcore optics for defined and perfectly controlled beam of light.  
Recessing accessory supplied separately.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



	<b>3000K</b>	<b>Light Source</b>	<b>Luminaire</b>
<b>Power</b>	<b>5,6W</b>	<b>7W</b>	
<b>Flux</b>	<b>460lm</b>	<b>350lm</b>	
<b>Efficiency</b>	<b>82lm/W</b>	<b>50lm/W</b>	
<b>LOR</b>	-	<b>76%</b>	
<b>UGR</b>	-	<b>&lt;10</b>	



**Beam angle**  
**Medium 40°**



**Weight**

mm

**Finishes**

- .01 White / RAL 9010
- .02 Black / RAL 9005

**Mandatory**

**59039** Trimless accessory (12.5mm ceilings)

155x18mm

**59040** Trimless accessory (15mm ceilings)

155x20mm


**59041** Trimless accessory (25mm ceilings)

155x30mm

**Optional**

**59083** Removal tool

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

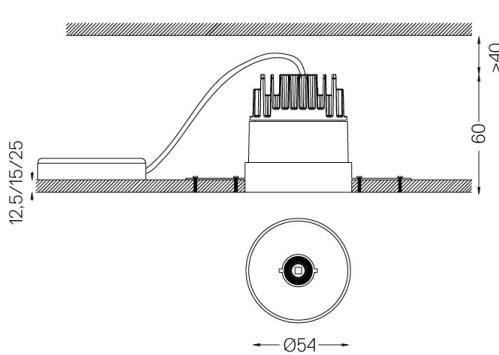

**Data according to regulations**

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class G

Model Identifier 4053560290H