



## One Trimless

5,6W / 430lm / 4000K / On/Off / Flood 56° /  
ø54mm

63521




Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Lightcore optics for defined and perfectly controlled beam of light.  
Recessing accessory supplied separately.

LED CRI>80 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



	<b>4000K</b>	<b>Light Source</b>	<b>Luminaire</b>
<b>Power</b>	<b>5,6W</b>	<b>7W</b>	
<b>Flux</b>	<b>490lm</b>	<b>430lm</b>	
<b>Efficiency</b>	<b>88lm/W</b>	<b>61lm/W</b>	
<b>LOR</b>	-	<b>88%</b>	
<b>UGR</b>	-	<b>&lt;19</b>	



Beam angle  
**Flood 56°**



Weight

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

**59039** Trimless accessory (12.5mm ceilings)

155x18mm

**59040** Trimless accessory (15mm ceilings)

155x20mm


**59041** Trimless accessory (25mm ceilings)

155x30mm

Optional

**59083** Removal tool

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

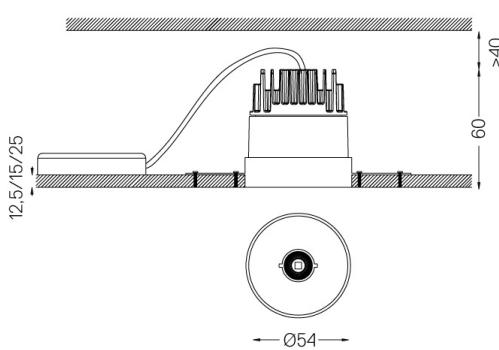

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class G

Model Identifier 4053560313H