



## One Trimless

3,1W / 200lm / 3000K / On/Off / Medium  
40° / ø39mm

63530



Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Lightcore optics for defined and perfectly controlled beam of light.  
Recessing accessory supplied separately.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



3000K

**Light Source**

**Luminaire**

**Power**

**3,1W**

**4W**

**Flux**

**260lm**

**200lm**

**Efficiency**

**84lm/W**


**50lm/W**

**LOR**

**77%**

**UGR**

**<10**



**Beam angle**  
**Medium 40°**



**Weight**

mm

**Finishes**

- .01 White / RAL 9010
- .02 Black / RAL 9005

**Mandatory**

**59042** Trimless accessory (12.5mm ceilings)

140x18mm

**59043** Trimless accessory (15mm ceilings)

140x20mm


**59044** Trimless accessory (25mm ceilings)

140x30mm

**Optional**

**59083** Removal tool

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

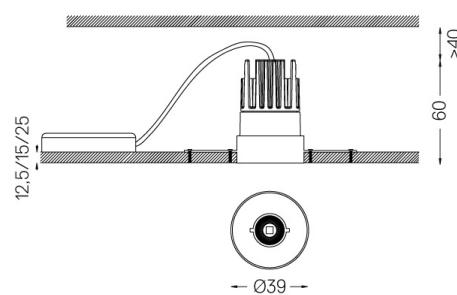

**Data according to regulations**

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class G

Model Identifier 4053560290L