

3,1W / 210lm / 4000K / On/Off / Medium 40°  
/ ø39mm

63534



Design: O/M + Bartenbach GmbH

Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.

Lightcore optics for defined and perfectly controlled beam of light.

Recessing accessory supplied separately.

LED CRI>80 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		3,1W	4W
Flux		280lm	210lm
Efficiency		90lm/W	53lm/W
LOR		-	75%
UGR		-	<10




Beam angle  
Medium 40°

Application



Weight

mm

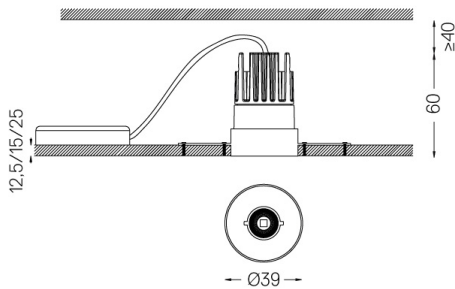

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

- 59042** Trimless accessory (12.5mm ceilings)  
140x18mm
- 59043** Trimless accessory (15mm ceilings)  
140x20mm
- 59044** Trimless accessory (25mm ceilings)  
140x30mm

Optional

- 59083** Removal tool

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class G Model Identifier 4053560313L

## One Trimless

Trimless accessory (12.5mm  
ceilings)

59042


1 mm

Ø53



Trimless accessory One ø45  
For 12.5mm ceilings.

Weight  
0,01Kg

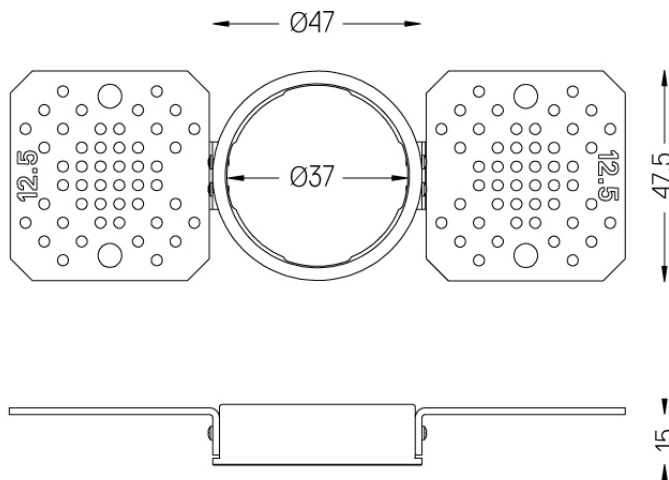


## One Trimless

Trimless accessory (15mm  
ceilings)

59043




Ø53



Trimless accessory One ø45  
For 15mm ceilings.

Weight  
0,01Kg

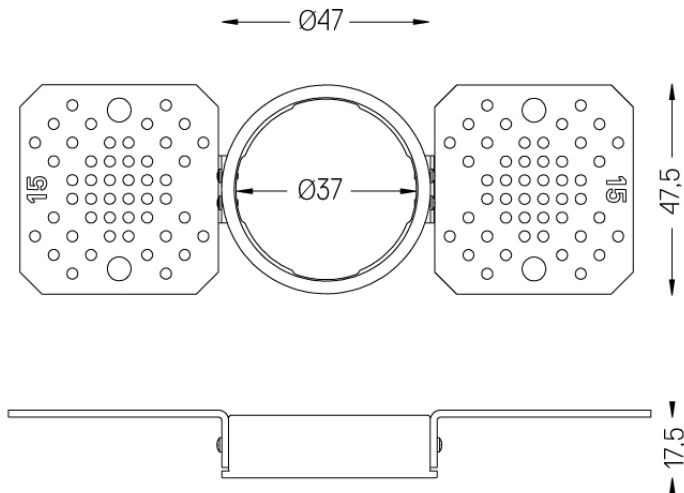

## One Trimless

Trimless accessory (25mm  
ceilings)


59044

mm


Ø53



Trimless accessory One ø45  
For 25mm ceilings.

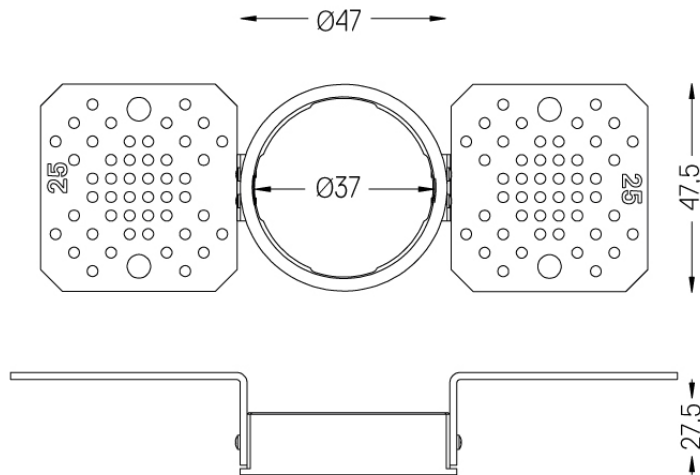

Weight  
0,01Kg

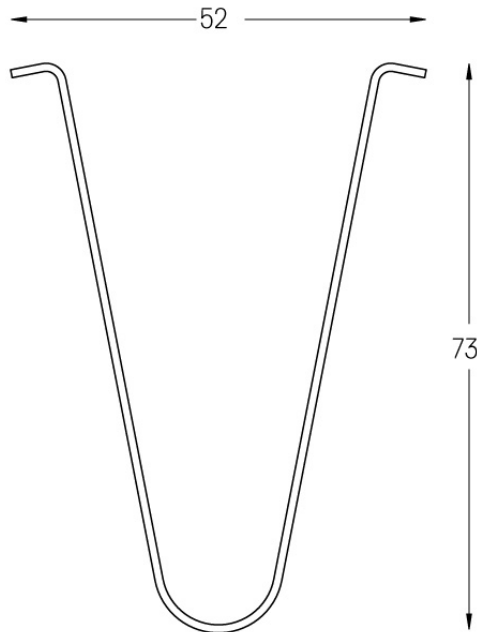

Removal tool

59083



Removal tool for Spot on  
luminaires.

Finishes  
.99