

3,1W / 210lm / 4000K / DALI / Medium 40° /
ø39mm

63536



Design: O/M + Bartenbach GmbH
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
Lightcore optics for defined and perfectly controlled beam of light.
Recessing accessory supplied separately.

LED CRI>80 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



4000K

Light Source

Luminaire

Power

3,1W

4W

Flux

280lm

210lm

Efficiency

90lm/W


53lm/W

LOR

75%

UGR

<10



Beam angle
Medium 40°



Weight

mm

Finishes

- .01 White / RAL 9010**
- .02 Black / RAL 9005**

Mandatory

59042 Trimless accessory (12.5mm ceilings)

140x18mm

59043 Trimless accessory (15mm ceilings)

140x20mm

59044 Trimless accessory (25mm ceilings)


140x30mm

Optional

59083 Removal tool

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

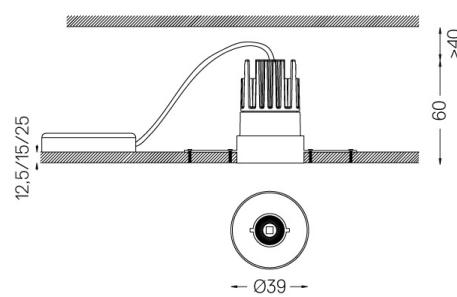

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class G
Model Identifier 4053560313L