

One Square Trimless

5,6W / 410lm / 3000K / On/Off / Flood 56° /
54x54mm

63543



Design: O/M + Bartenbach GmbH
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
Lightcore optics for defined and perfectly controlled beam of light.
Recessing accessory supplied separately.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



3000K

Light Source

Luminaire

Power

5,6W

7W

Flux

460lm

410lm

Efficiency

82lm/W

59lm/W

LOR


-

89%

UGR

-

<19

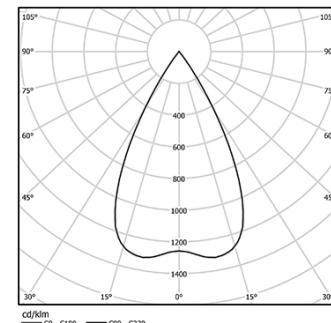

Beam angle
Flood 56°

Application

Weight

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

59045 Trimless accessory (12.5mm ceilings)

155x18mm


59046 Trimless accessory (15mm ceilings)

155x20mm

59047 Trimless accessory (25mm ceilings)

155x30mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

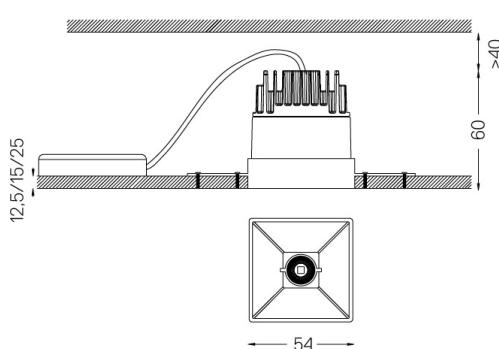

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class G
Model Identifier 4053560290H