


3,1W / 230lm / 3000K / DALI / Flood 56° /  
39x39mm

63557



Design: O/M + Bartenbach GmbH

Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.


Lightcore optics for defined and perfectly controlled beam of light.

Recessing accessory supplied separately.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power	3,1W		4W
Flux	260lm		230lm
Efficiency	84lm/W		58lm/W
LOR	-		88%
UGR	-		<16

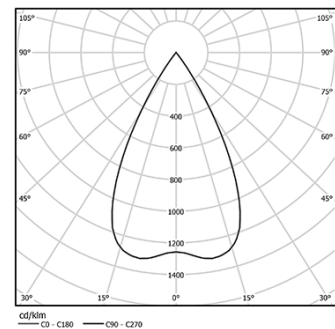


Beam angle  
Flood 56°

Application



Weight

mm

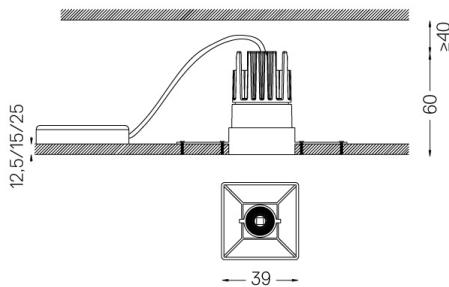

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

- 59048** Trimless accessory (12.5mm ceilings)  
140x18mm
- 59049** Trimless accessory (15mm ceilings)  
140x20mm
- 59050** Trimless accessory (25mm ceilings)  
140x30mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class G Model Identifier 4053560290L

## One Square Trimless

Trimless accessory (12.5mm  
ceilings)


59048



52x52



Trimless accessory One 45x45.  
For 12.5mm ceilings.

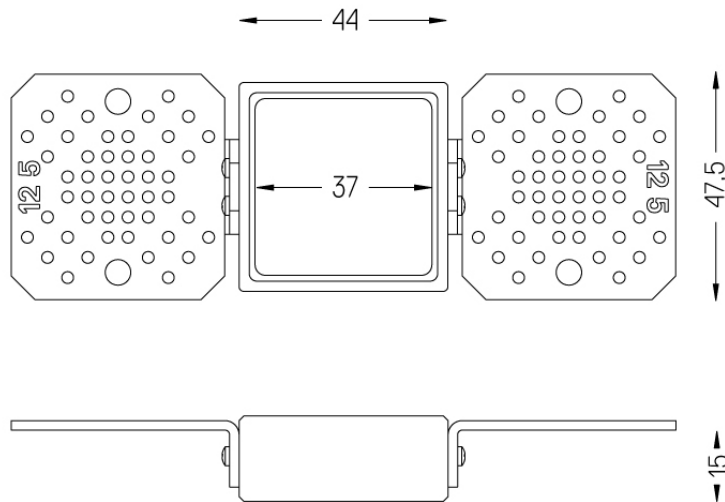

Weight  
0,01Kg

Finishes  
○ .01 White / RAL 9010

## One Square Trimless

Trimless accessory (15mm  
ceilings)


59049



52x52



Trimless accessory One 45x45.  
For 15mm ceilings.

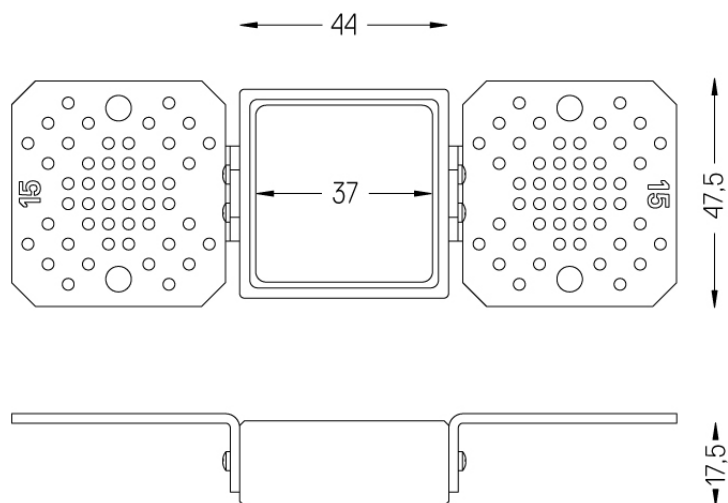

Weight  
0,01Kg

Finishes  
○ .01 White / RAL 9010

## One Square Trimless

Trimless accessory (25mm  
ceilings)

59050



52x52



Trimless accessory One 45x45.  
For 25mm ceilings.

Weight  
0,01Kg

Finishes  
○ .01 White / RAL 9010

